


Adsorbent A-4M (microspherical) Bleaching clay

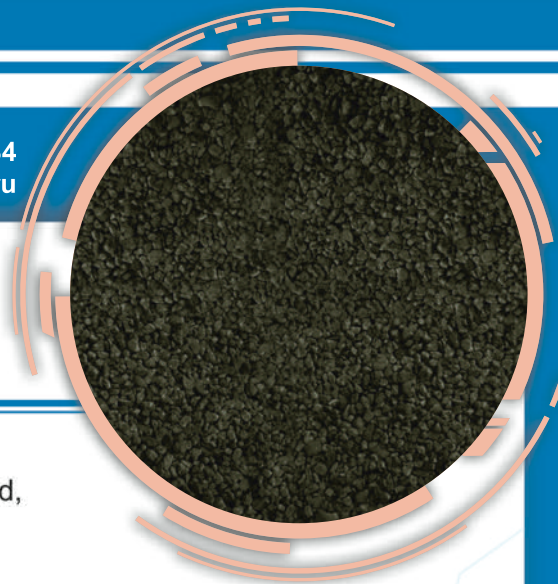

Principal applications:

- purification of aromatic and paraffin hydrocarbons from unsaturated, resinous and coloring compounds.

Manufactured according to Technical Specifications 2163-002-05766557-95

Parameters	Standards acc. to TS	Actual parameters
Bulk density, g/cm ³	0,5 – 1,0	0,8 -1,0
Fractional content, % Mass fraction within 0,2-1,2 mm Mass fraction within 0,2-0,315 mm		not less 95 not more 28
Specific surface, m ² /g	125	130 - 160
Specific quantity of the purified aromatic feed, g/g, not less than	10	15-30
Water content, %, not less than	15	5-10

Note: at the request of the consumer, adsorbent A-4M can be supplied in the form of extrudates of cylindrical shape of the desired diameter.

OUR CUSTOMERS



ИРКУТСКАЯ
НЕФТЯНАЯ
КОМПАНИЯ